

Efficient Networks



# SIEMENS

SpeedStream 5262 ADSL Modem  
Configuration Procedure  
*Windows NT/98/Me/2000*


- Ensure that the modem is powered on, the phone cable connected to the back of the modem and the Ethernet cable is connected directly between the modem and your computer (**please do not connect the modem to your router yet if you have one**). **Make sure the Ethernet cable is not a crossover cable.**
- Download the EnterNet 300 Client Software on to your desktop from the website listed in the email sent to you. The file name is EnterNet300v1.5c.exe. When the download is complete, double click on this file.





You should see the below screen:

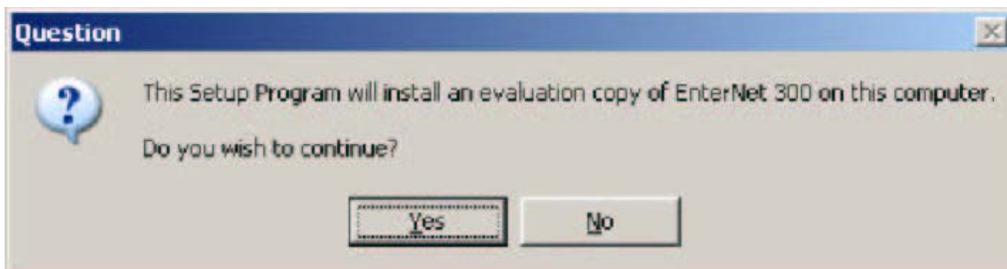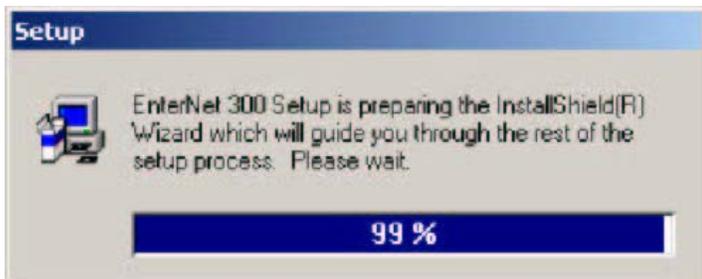

Click YES to the above screen

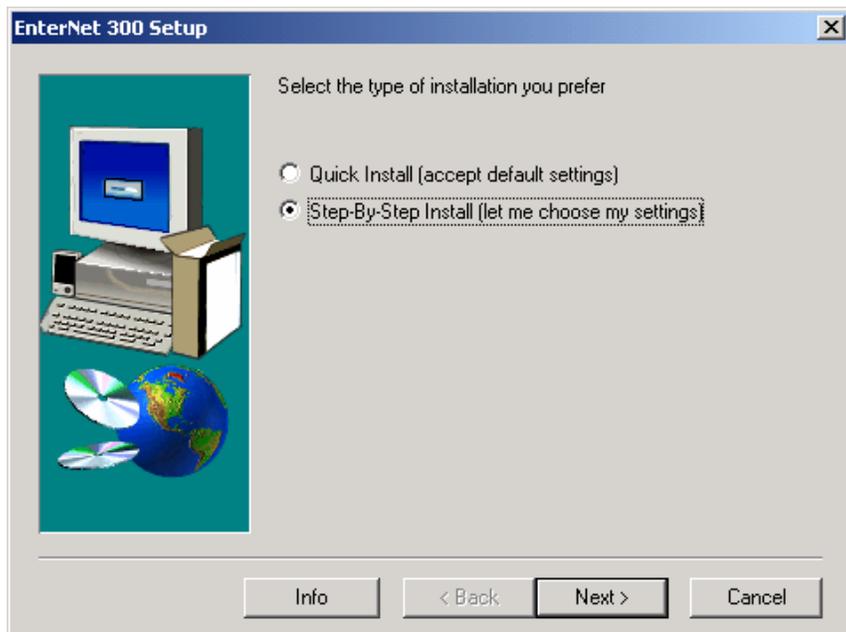


Choose the Step by Step option and click Next. Proceed through the next two screens by clicking Accept to the license agreement and then choose the destination directory for the program files, as shown below:

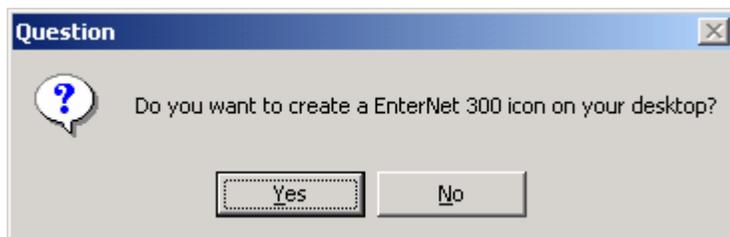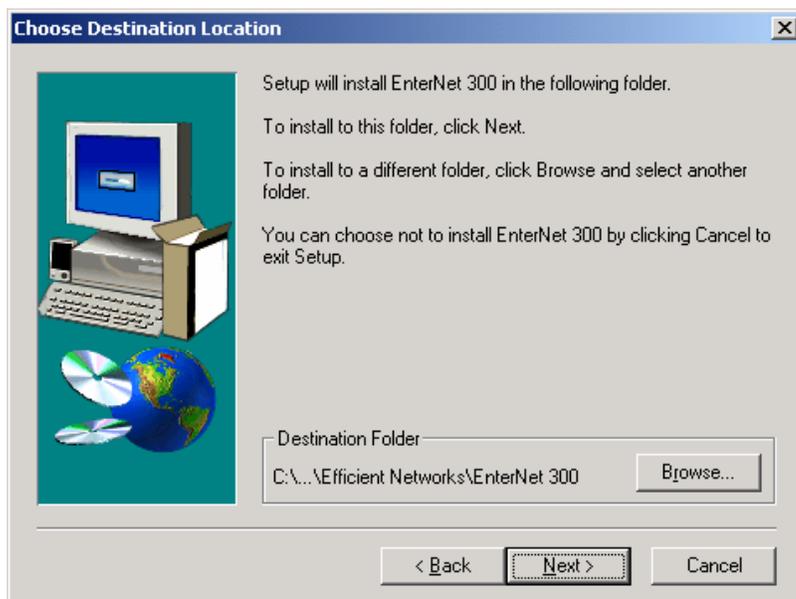


Click YES when you are prompted to create an icon on your desktop.

Setup will now be complete after copying over some files. Depending on your system settings, you may be asked to reboot your computer. If given this option, choose Yes and the computer will restart automatically.

When the computer has restarted, double click on the EnterNet 300 client shortcut on your desktop. That icon is depicted below:

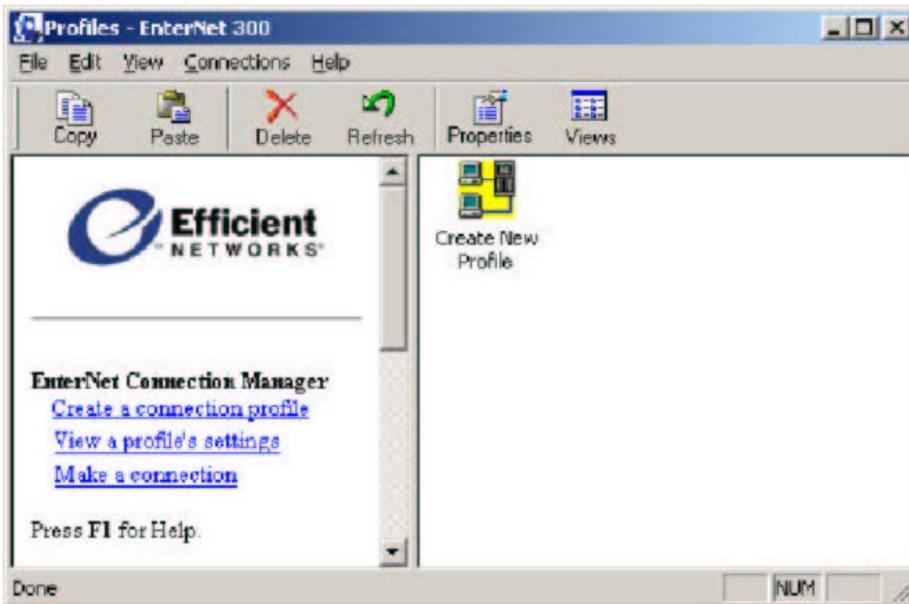

Double Click on Create New Profile

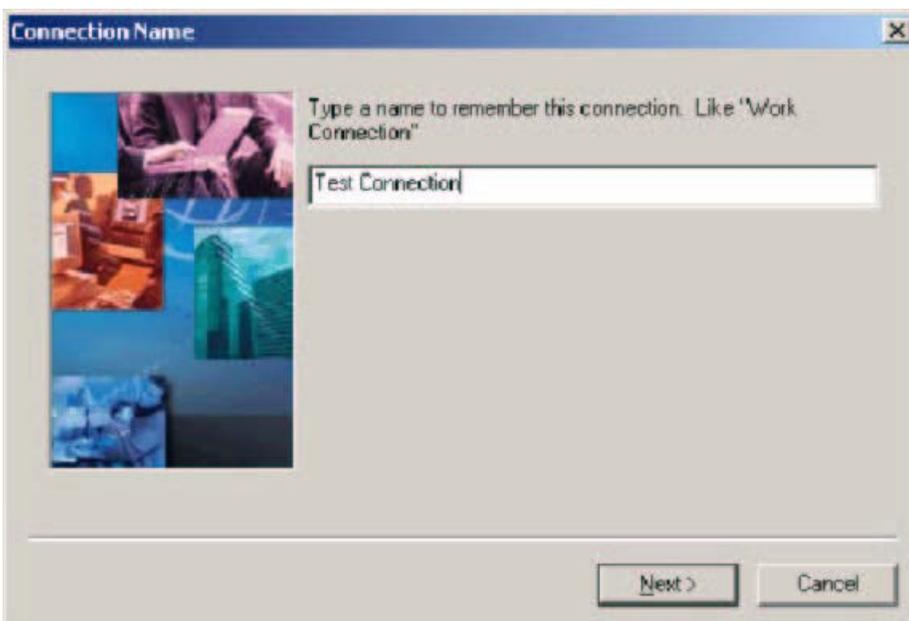


Enter in a name for the connection. This can be anything you want.




The dialog box titled "User Name and Password" contains three input fields. The first field is labeled "Enter the User Name for this Connection" and contains the text "abc@111.test.com". The second field is labeled "Enter the Password for this Connection" and is empty. The third field is labeled "Enter the Password one more time" and is empty. At the bottom, there are three buttons: "< Back", "Next >", and "Cancel".

Enter in the userid and password for your DSL account. This information is provided by your ISP. Click Next.

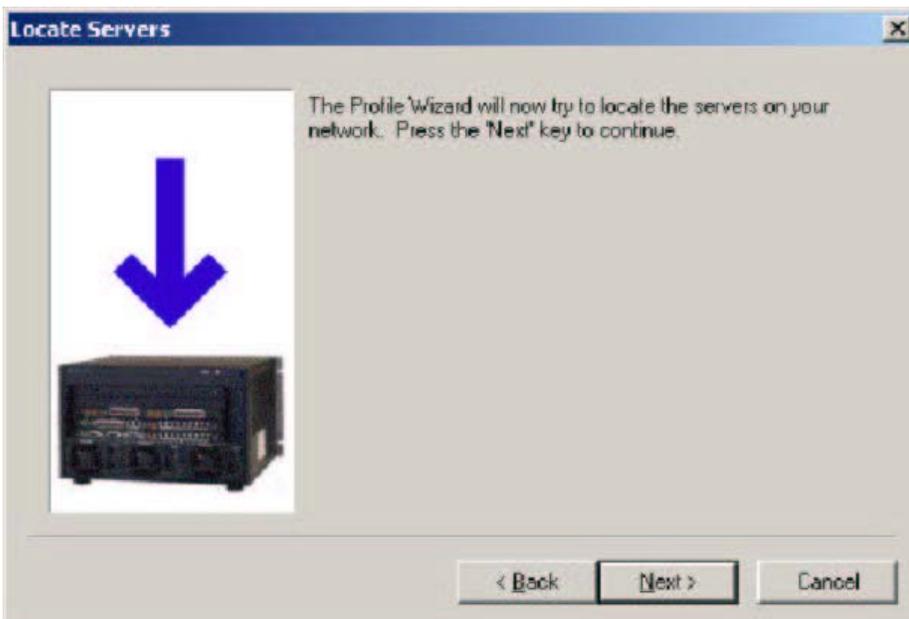


The dialog box titled "Locate Servers" features a large blue downward-pointing arrow above a photograph of a DSL modem. To the right of the image, the text reads: "The Profile Wizard will now try to locate the servers on your network. Press the 'Next' key to continue." At the bottom, there are three buttons: "< Back", "Next >", and "Cancel".

Click Next to the above screen

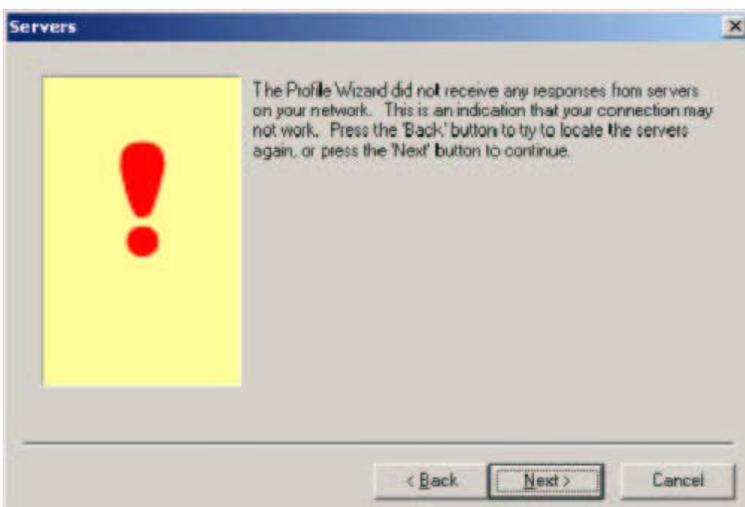


The dialog box titled "Servers" displays a large red exclamation mark on a yellow background. To the right, the text reads: "The Profile Wizard did not receive any responses from servers on your network. This is an indication that your connection may not work. Press the 'Back' button to try to locate the servers again, or press the 'Next' button to continue." At the bottom, there are three buttons: "< Back", "Next >", and "Cancel".

You will get an error message. This is **NORMAL**. Click next to continue

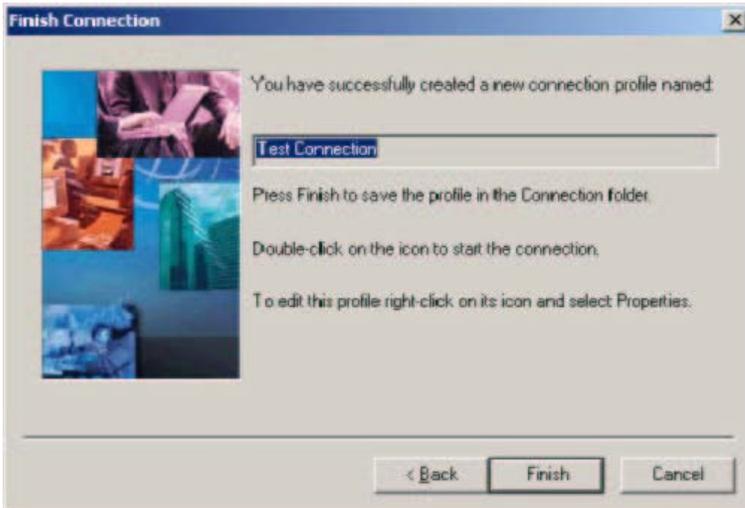


Click Finish to complete the connection.

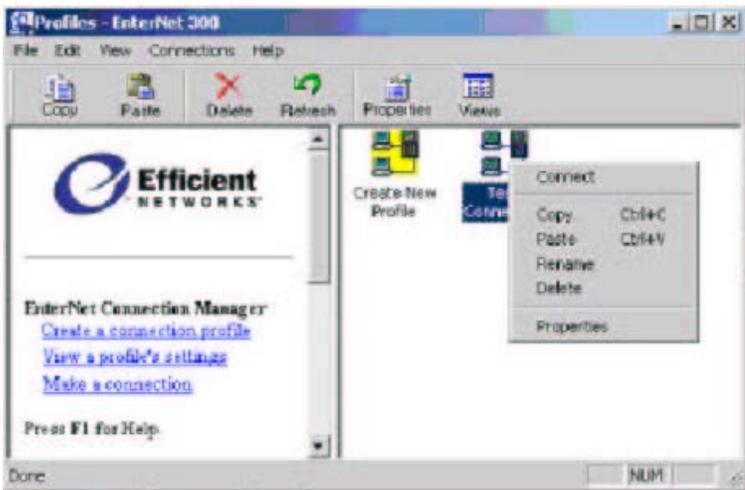


Right-Click on the connection you created and click Properties.



Click the DSL Modem tab at the top of the screen, then the Discover button. Click Start when prompted to start VPI/VCI discovery.

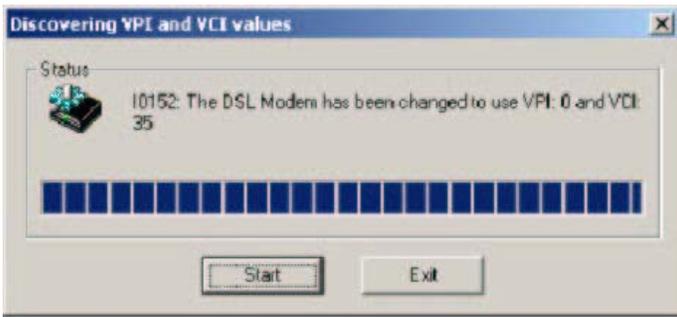

Click Exit when you receive the above screen

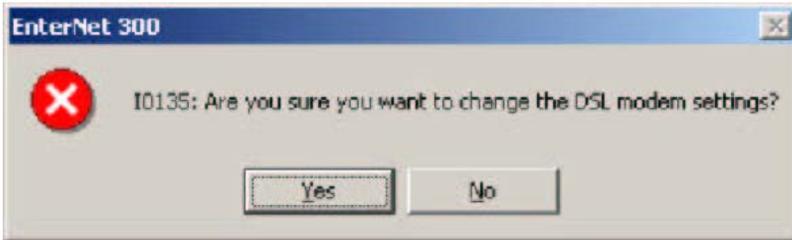

Click Yes to confirm the settings change, then OK to close the Properties window.

Your modem is now ready to use! The EnterNet software only has to be used to configure the modem once, and should be uninstalled under Control Panel -> Add/Remove Programs when you have finished this process.

If you are not using a router, use the connection software that your ISP supplied. This version of EnterNet is to be used for configuration purposes only.

If you are using a router, you can now plug the DSL modem into your router as it is now ready to use.

**Please contact [support@gmbargains.com](mailto:support@gmbargains.com) with all technical support inquiries.**